

Andean Sling Braids: New Designs for Textile Artists


by Rodrick Owen and Terry Newhouse Flynn

ISBN 978-0-7643-5103-7

May 1, 2018

Clarifications and Errata

Page 158, corrected fig. for Design 24.18:

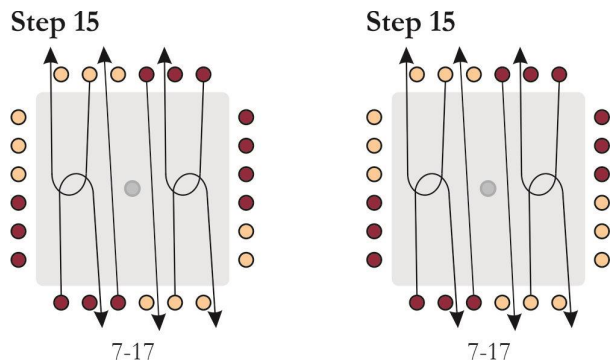

Page 202, Clarification Advisory for "Braiding Stand":

The distance from the front edge of crossarm (B) to the center of the harness support hole is 1" (25 mm).

The holes in the harness support dowel are 1/2" (12 mm) from center to center. (In most cases only the first few holes will be used.)

Page 204, Clarification and replacement text for "Harness":

For the harness you will need:

Harness arms: 2 x 12" x 3/8" x 1/2" (19 mm x 10 mm) piece of scrap hardwood

9+(228 mm) length of 7/8+(22 mm) hardwood dowel for harness support

4" (10 mm) length of 3/16" (5 mm) diameter dowel to secure the harness support to the crosspiece

3/16" (5 mm) drill bit for drilling holes in the harness support dowel

7/8" (22 mm) drill bit for drilling the hole in the crossarm

12 1/4" shaped brass screw hooks that extend 1" (25 mm) from the screw (Bend slightly to make the angle a little more acute. See figure A.3.)

1 woodscrew for securing dowel to crosspieces